

FIG. 1 is a perspective view of the device.

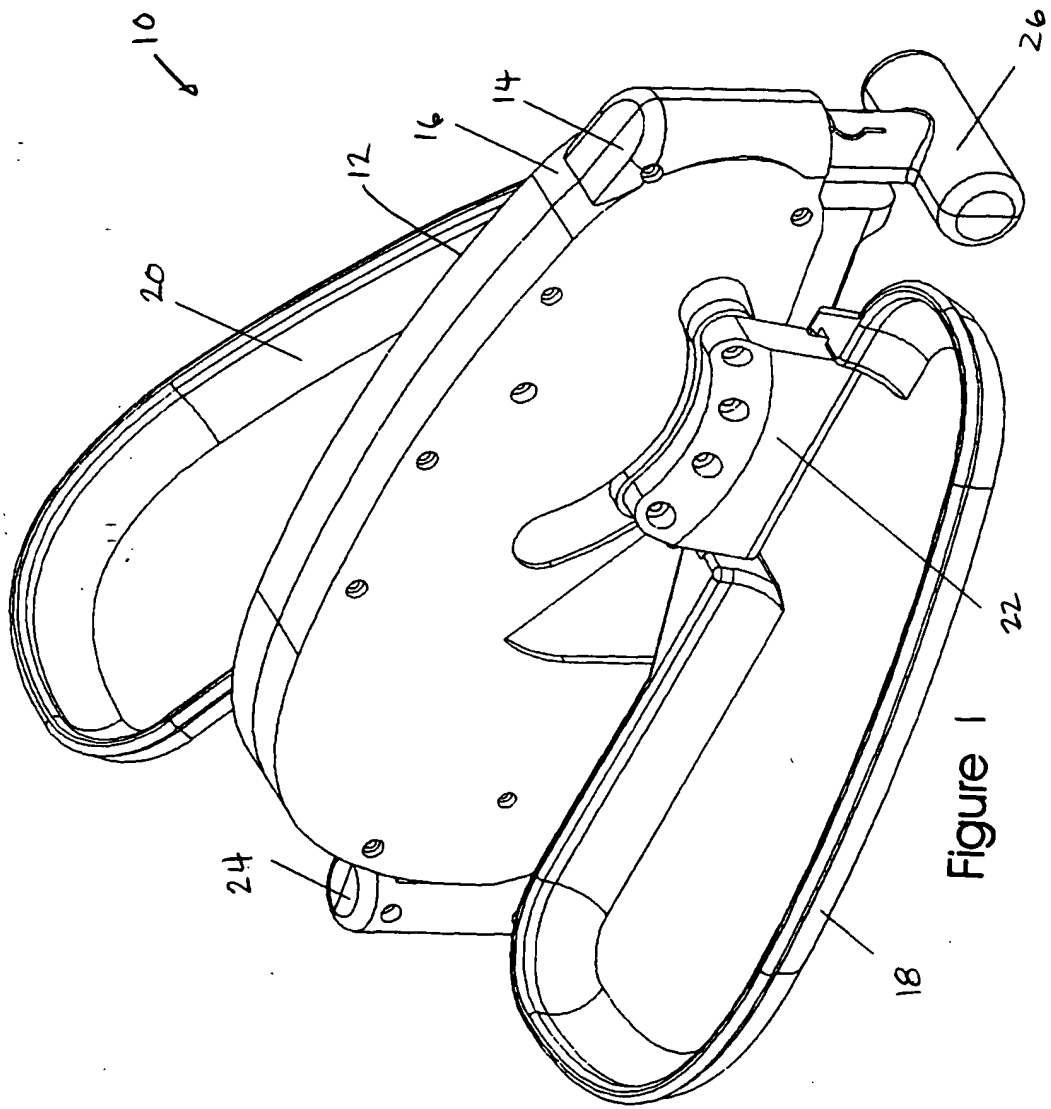
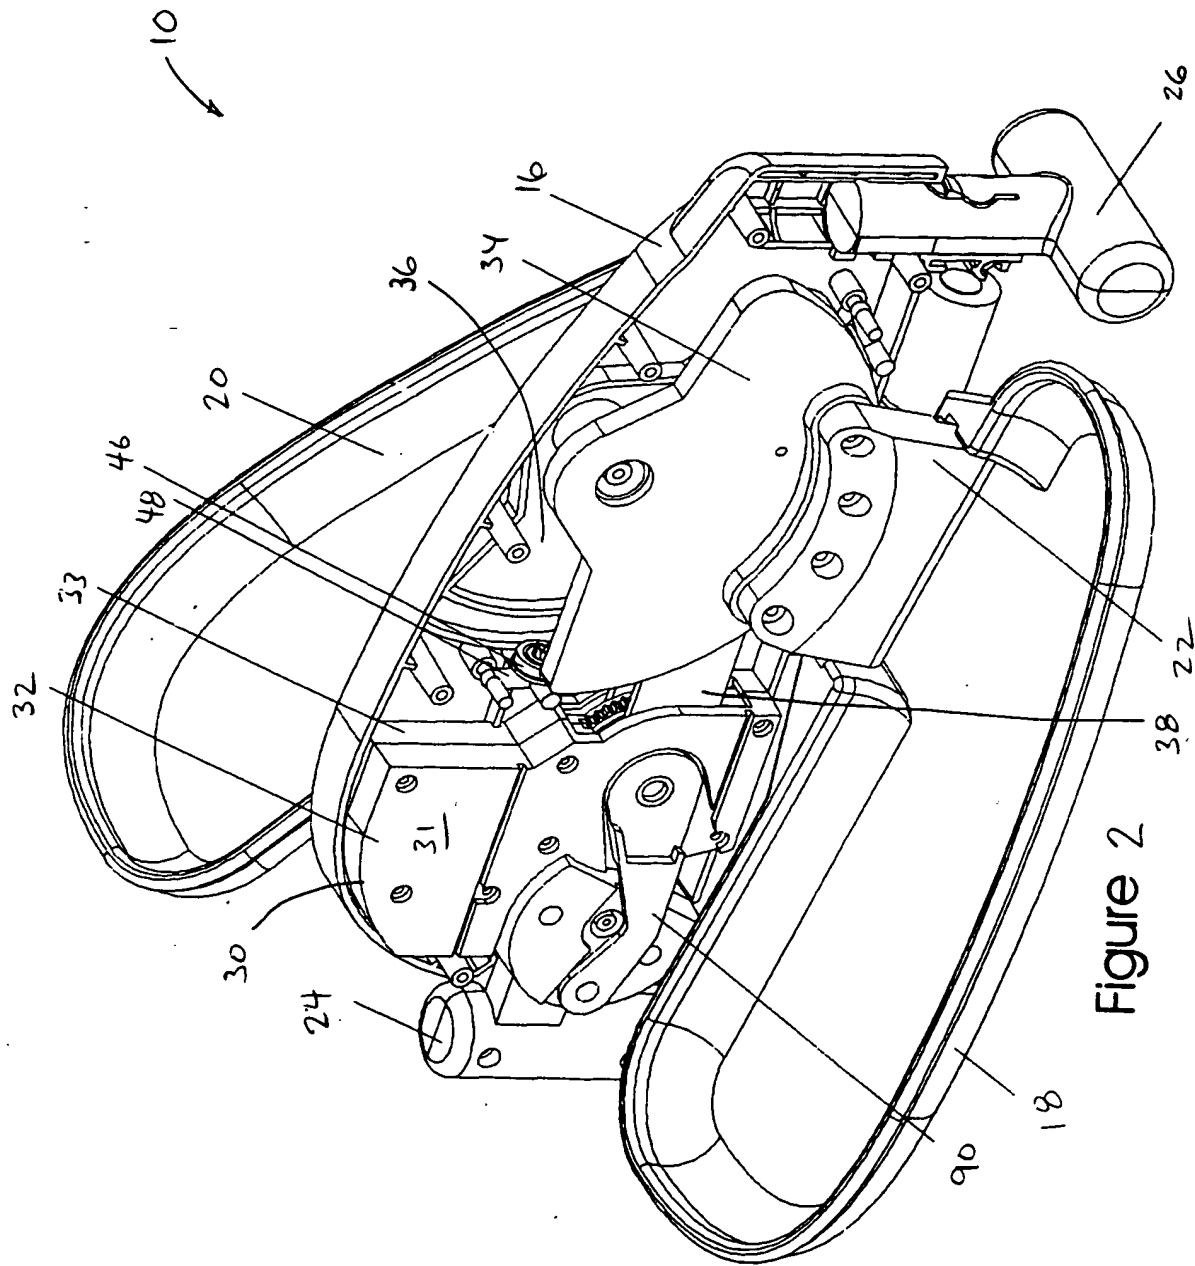


Figure 1




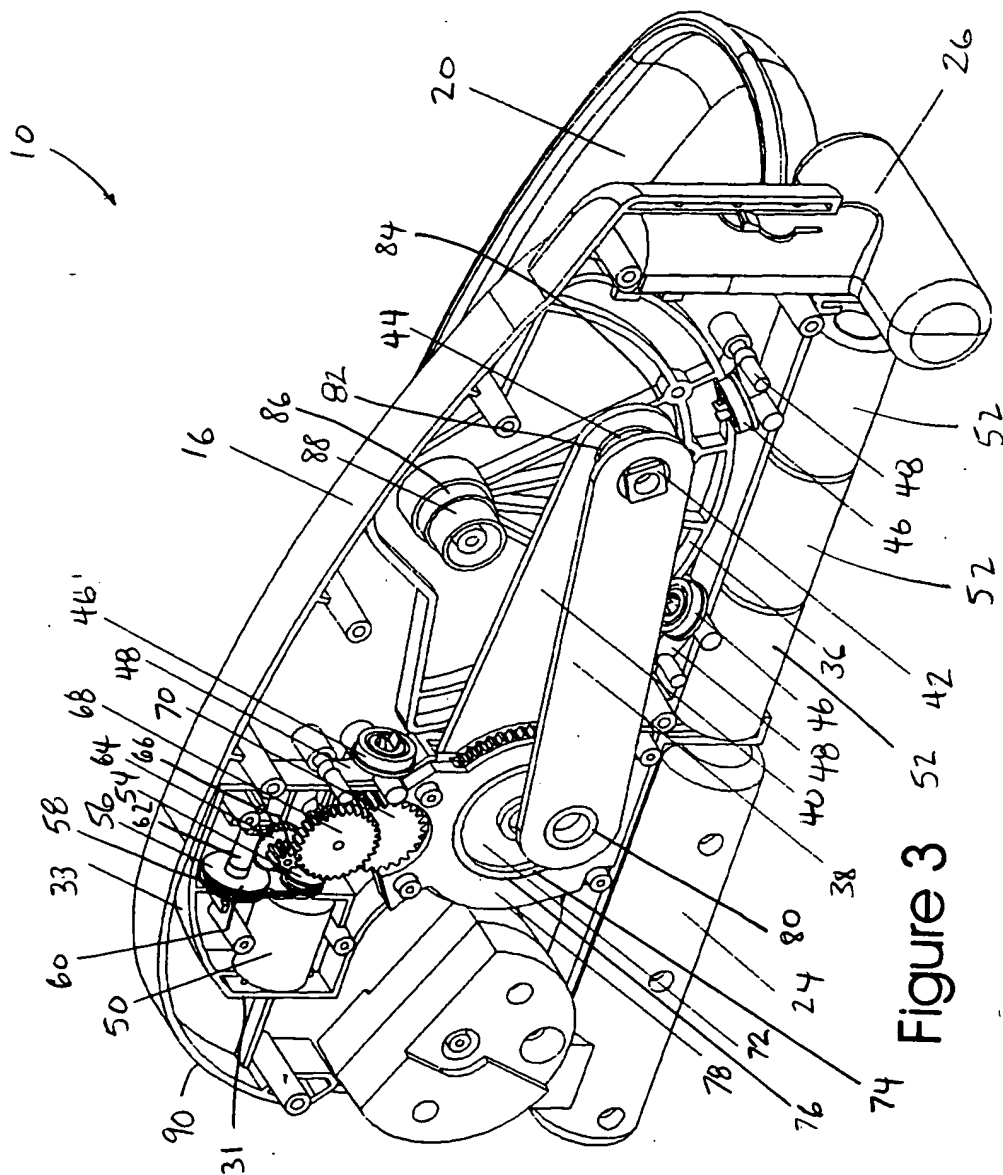



Figure 3

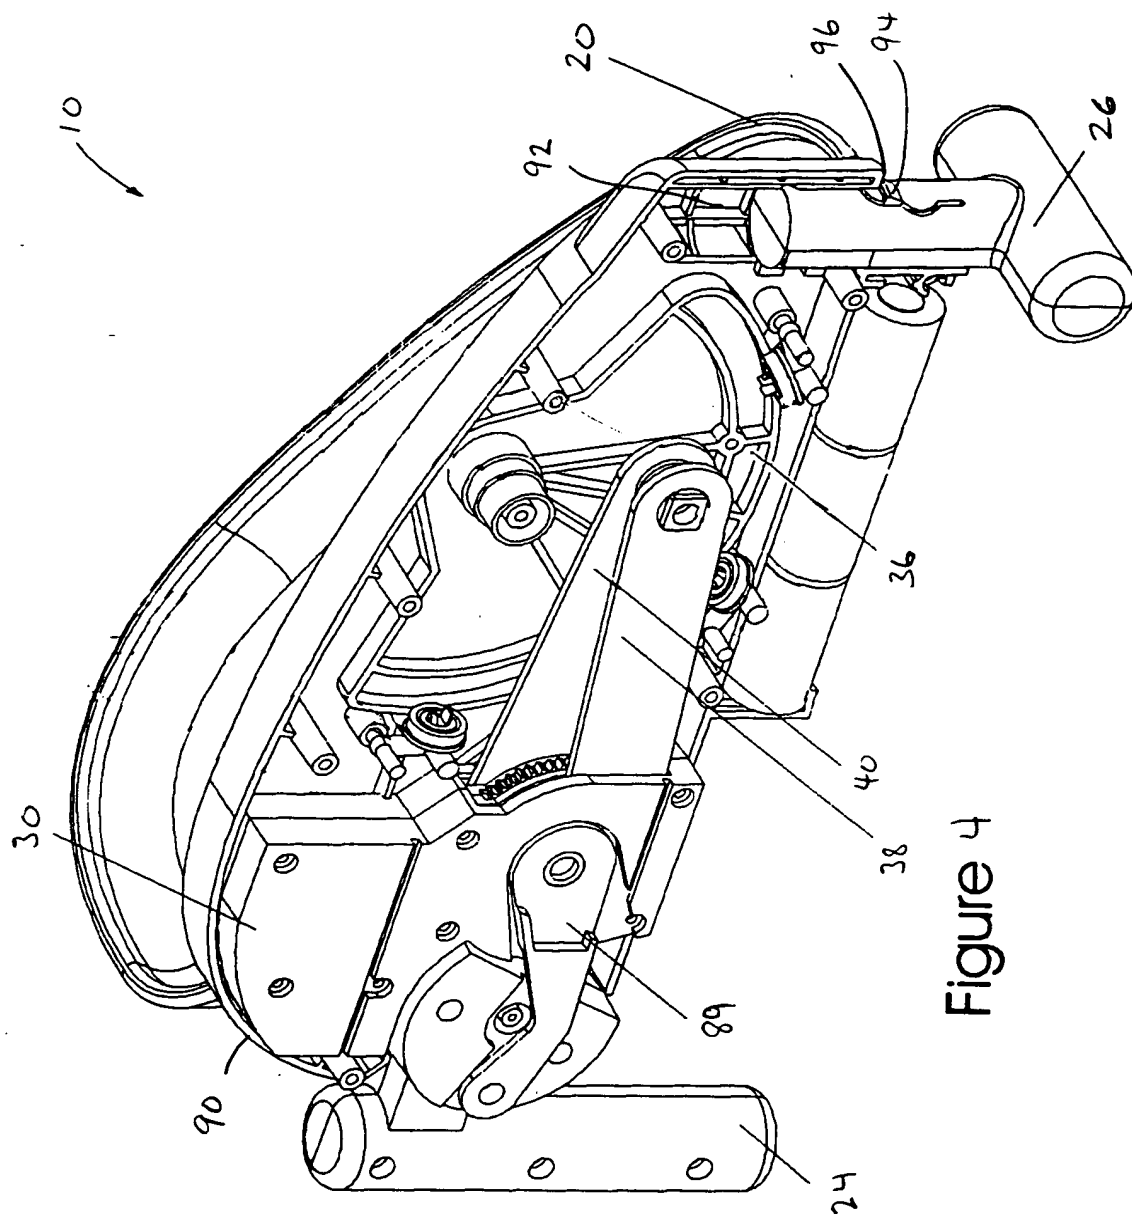


## Figure 4

FIG. 1 is a perspective view of a vehicle headlight assembly 10. The assembly includes a main housing 12 with a lens 18. A mounting bracket 20 is attached to the bottom of the housing, featuring a circular mounting flange 24. A fastener 22 is visible on the side of the housing.


Fig. 5

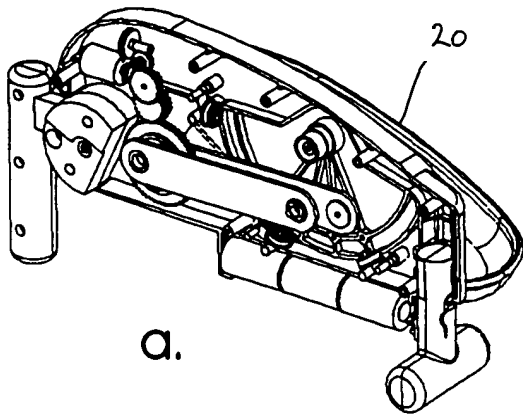


a.

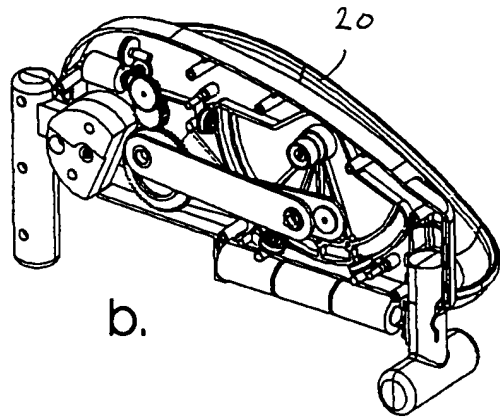


b.

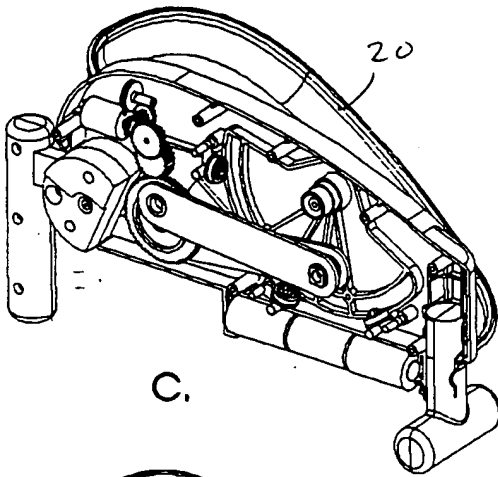


c.

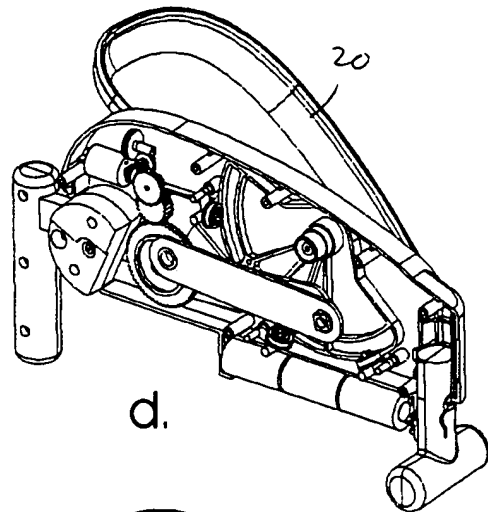

d.

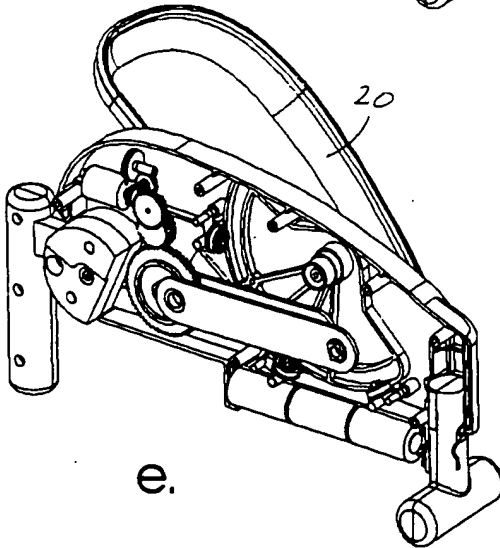

e.

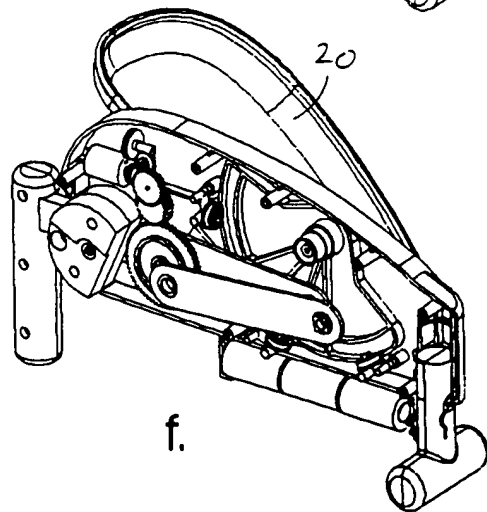

f.

Figure 6

FIG. 7 is a perspective view of the device 100 in a closed position, showing the handle 118 and the frame 120.

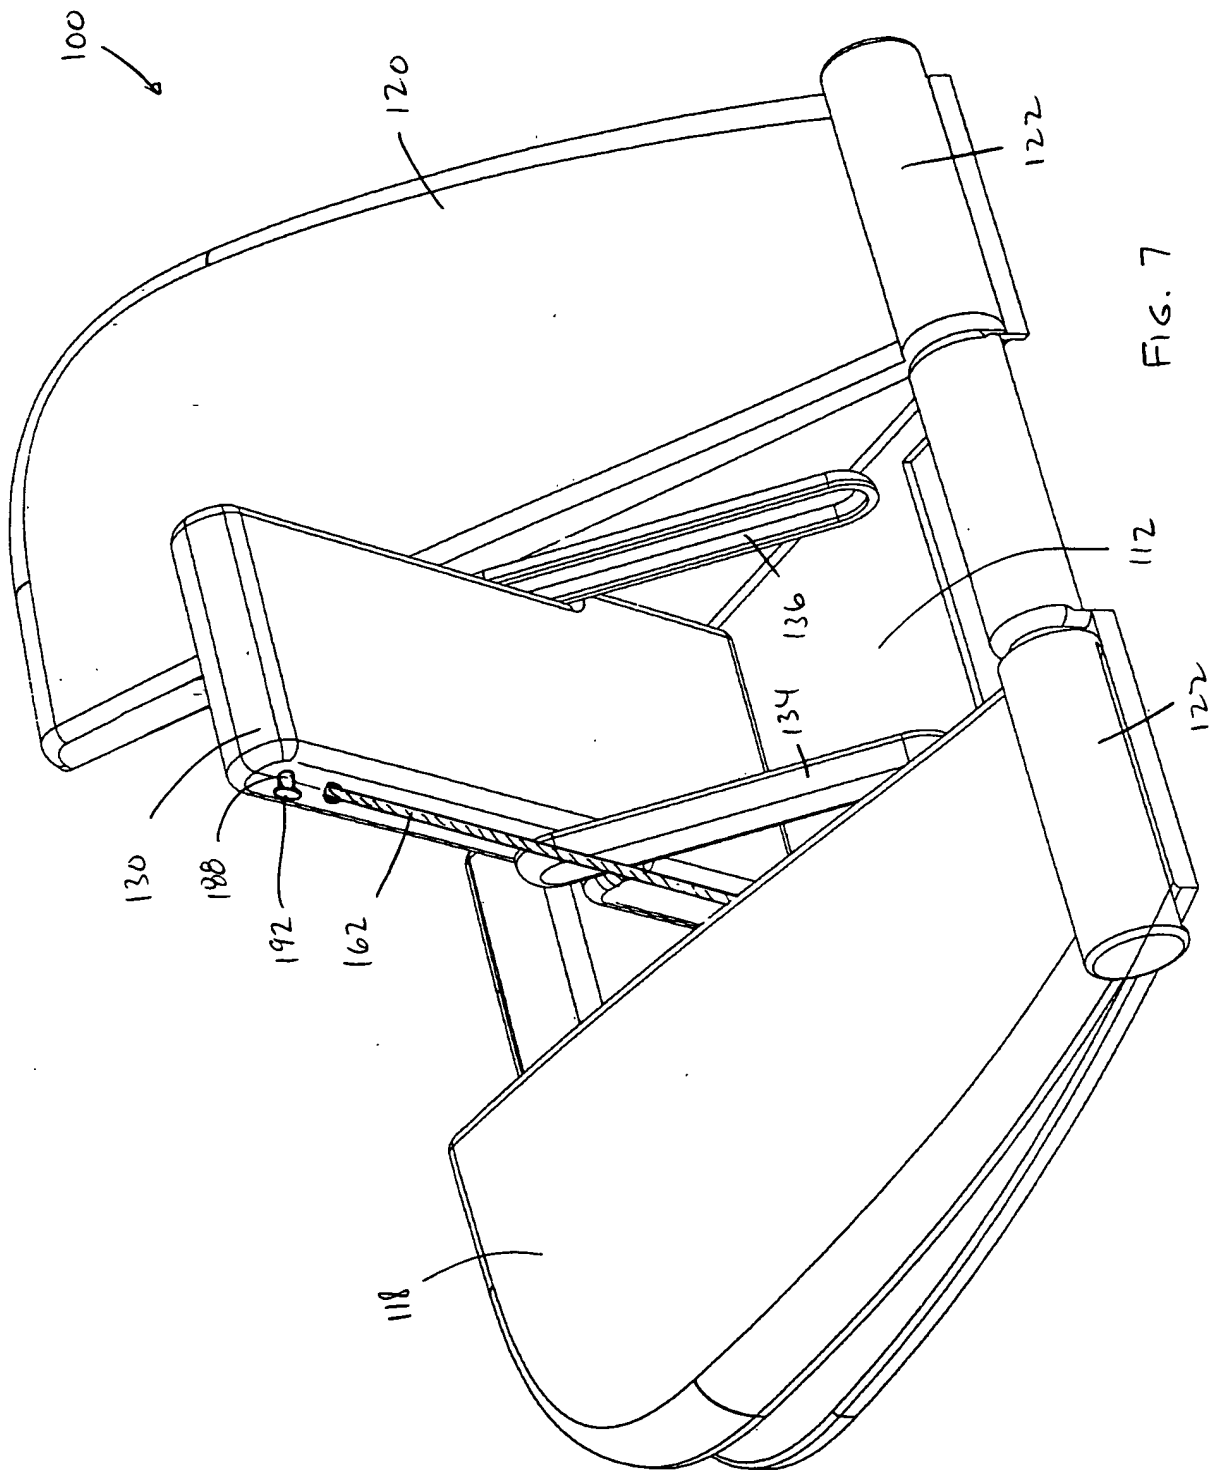


FIG. 7

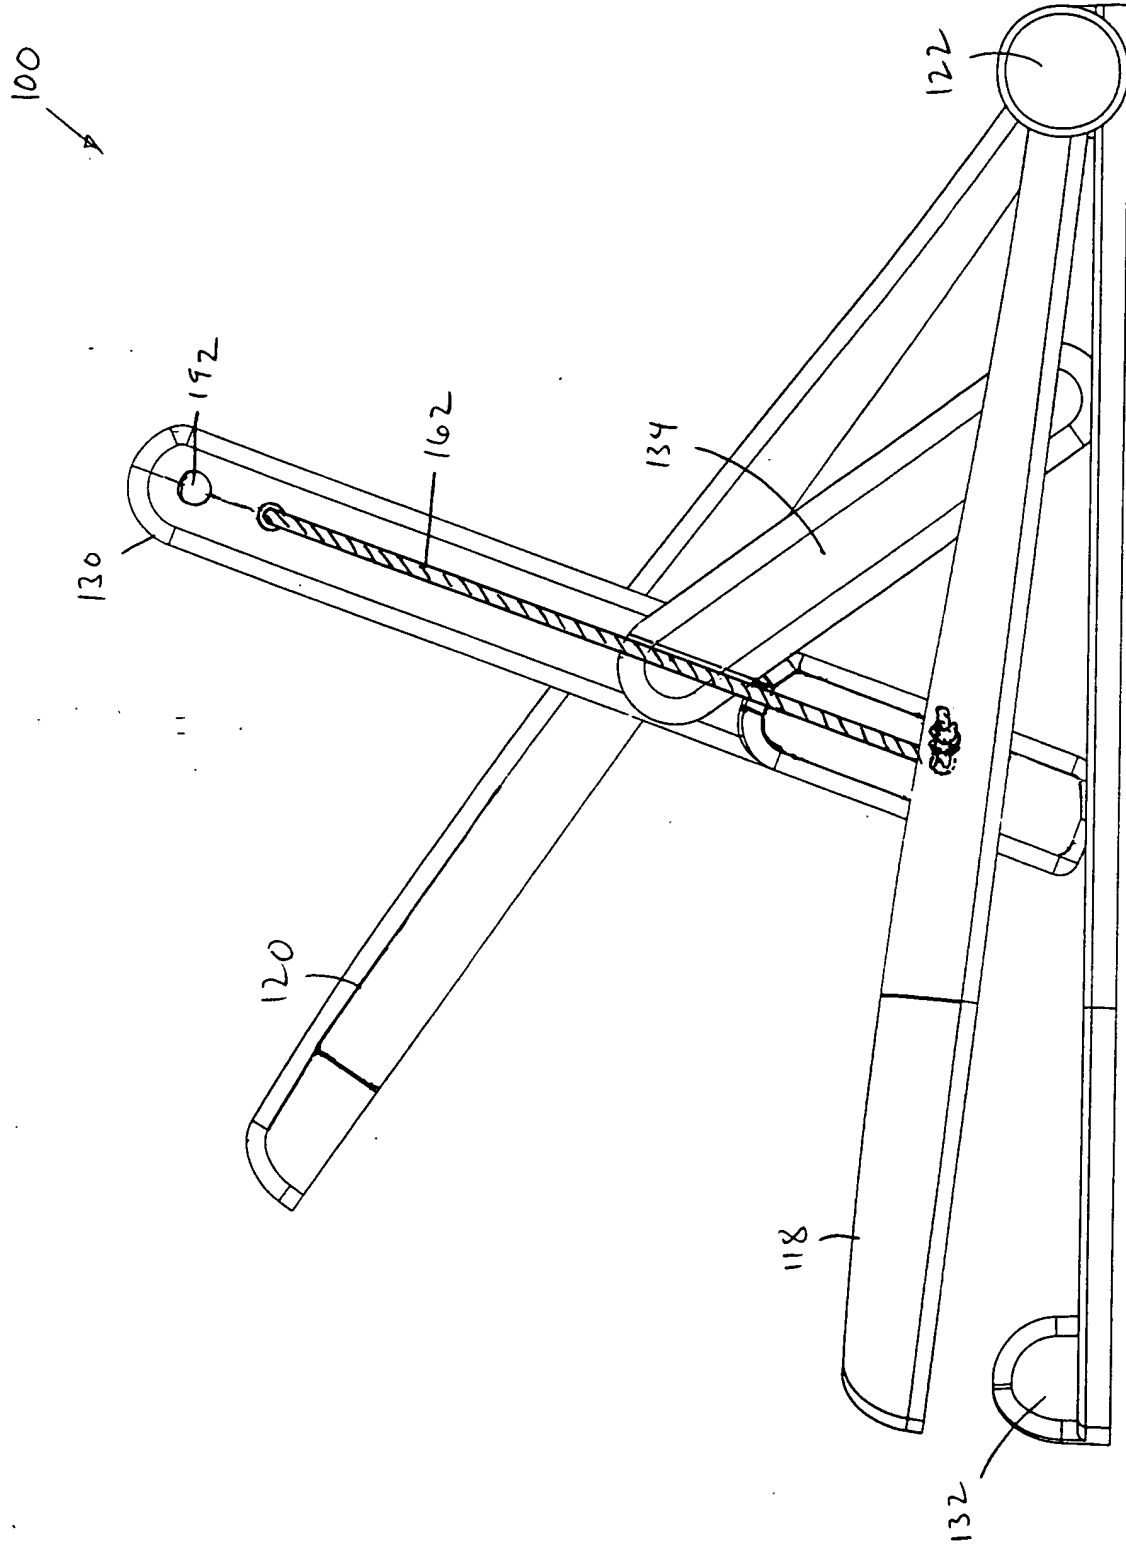


FIG. 8



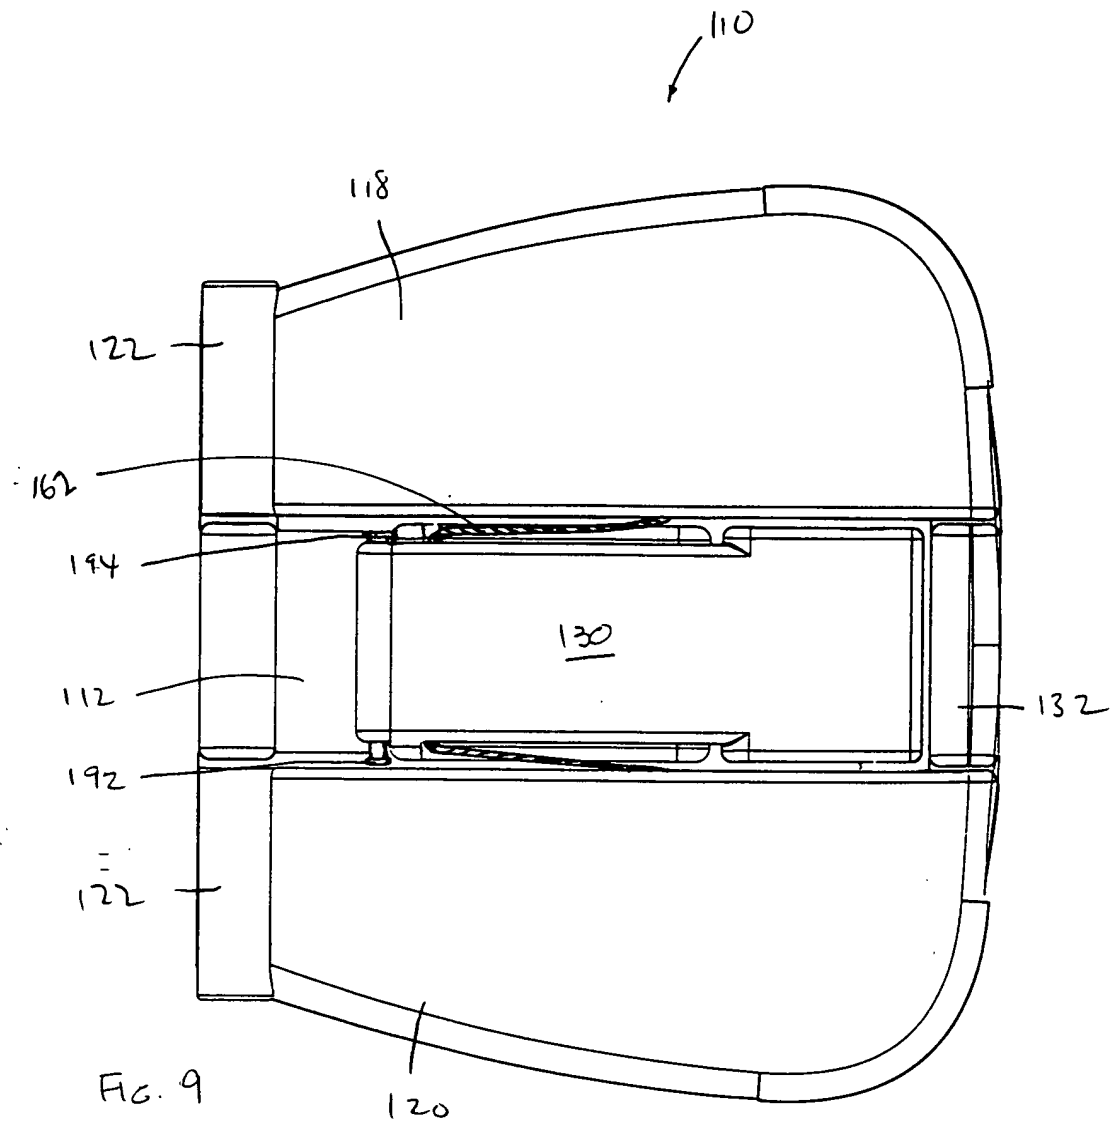


FIG. 9

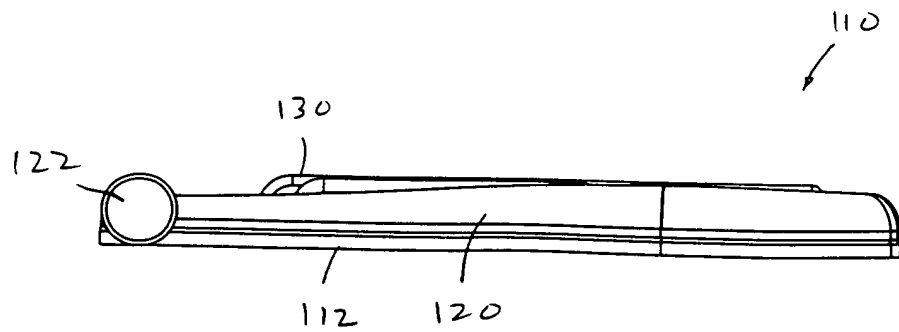


FIG. 10





FIG. 13

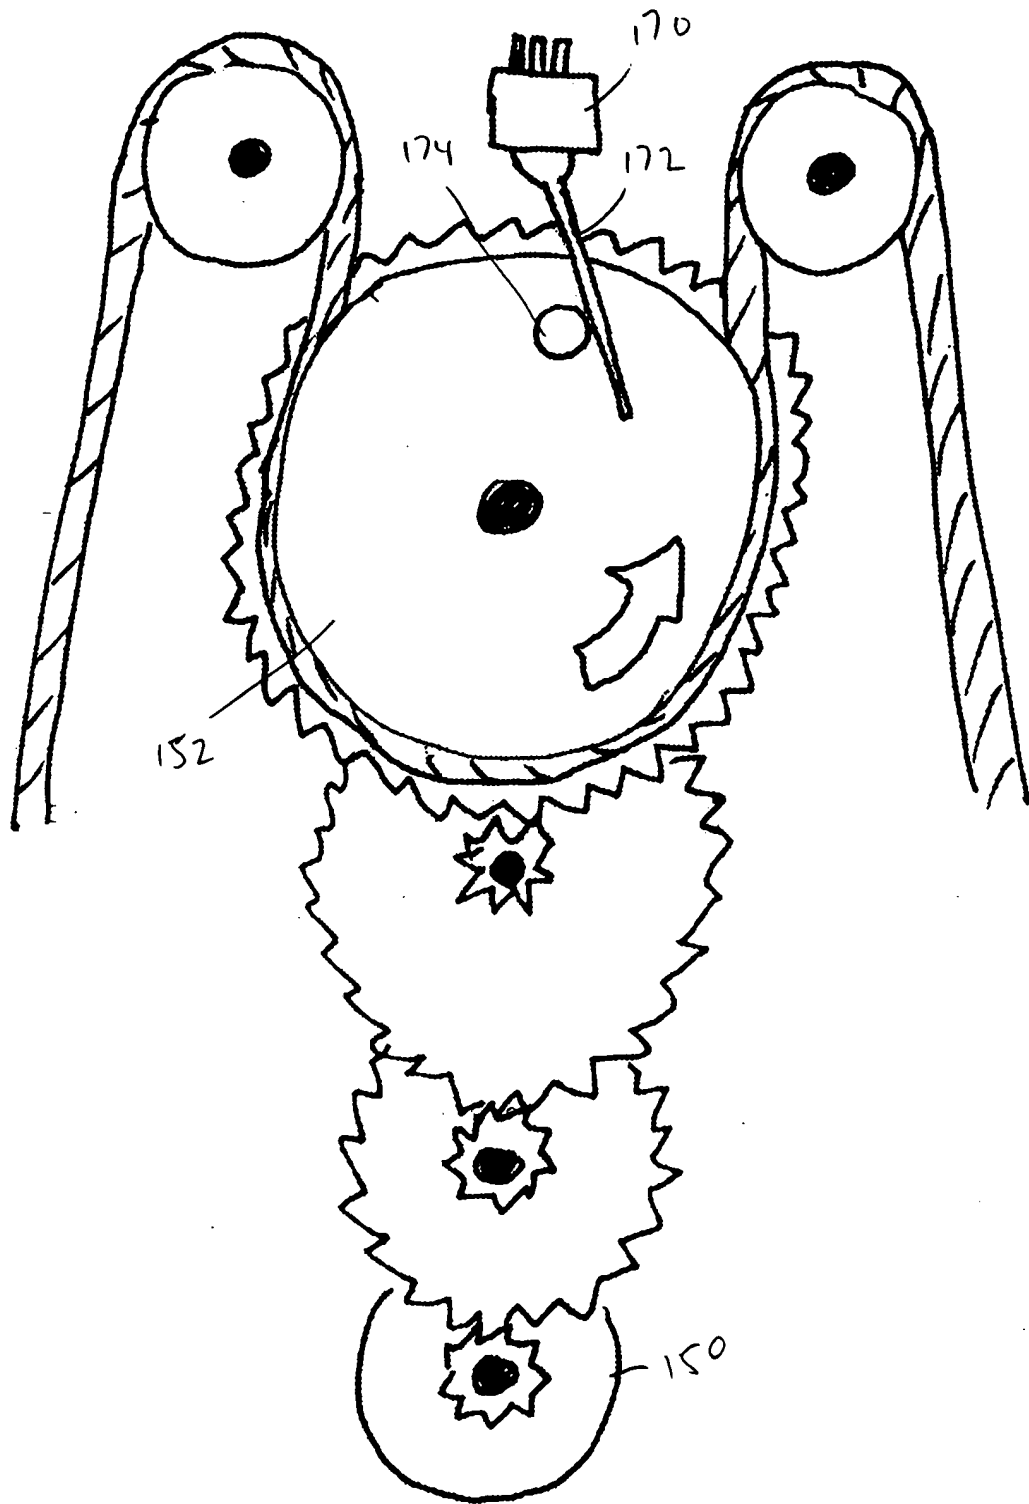


FIG. 13

FIG. 14

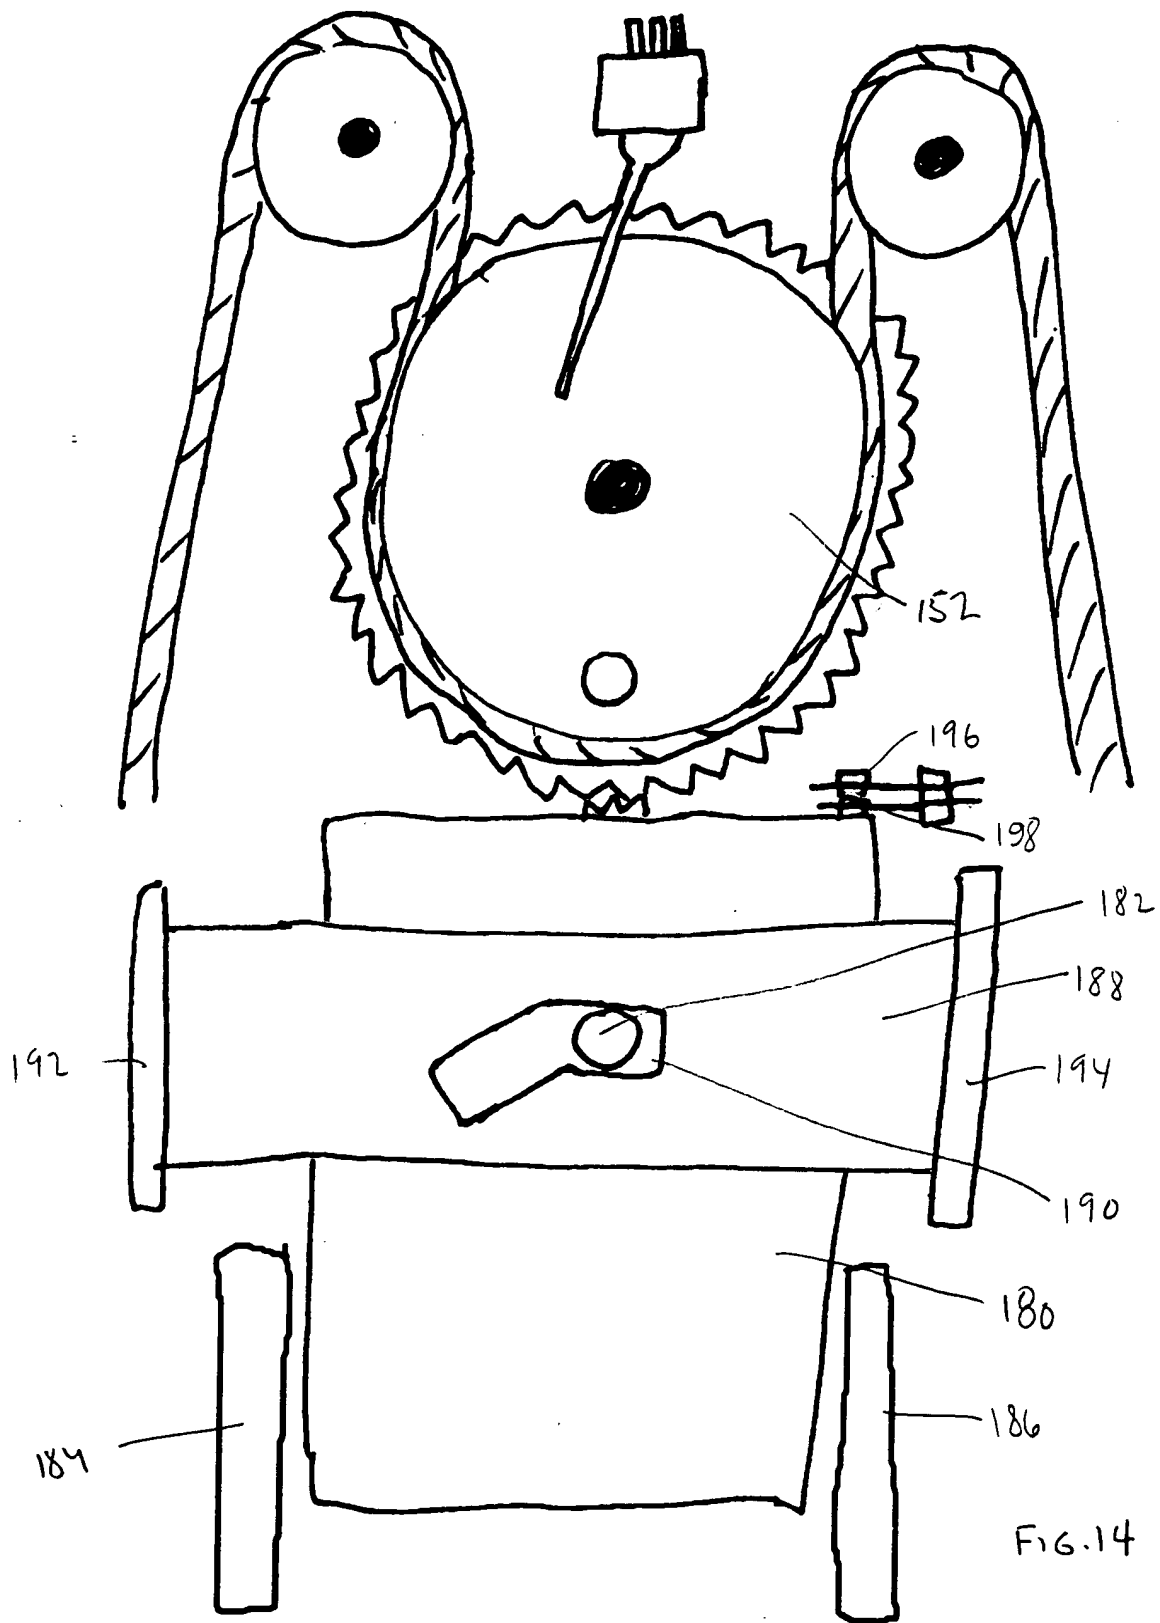


FIG. 14

4003464

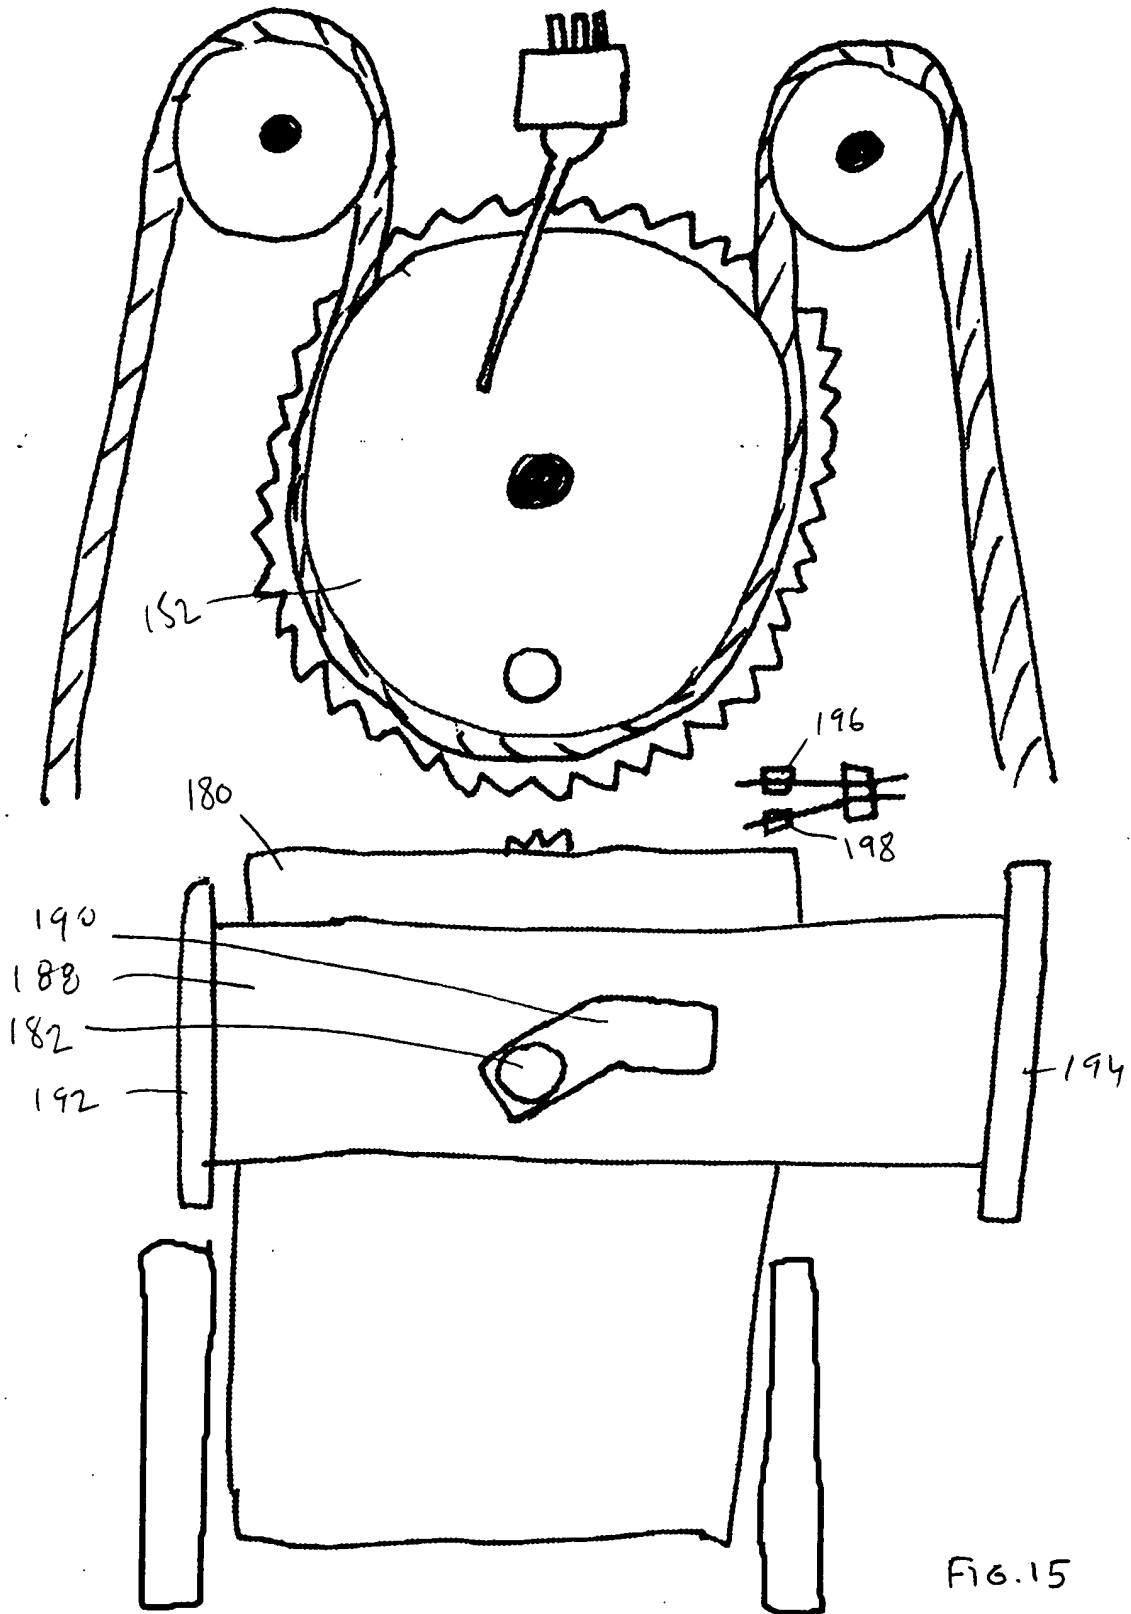


FIG. 15

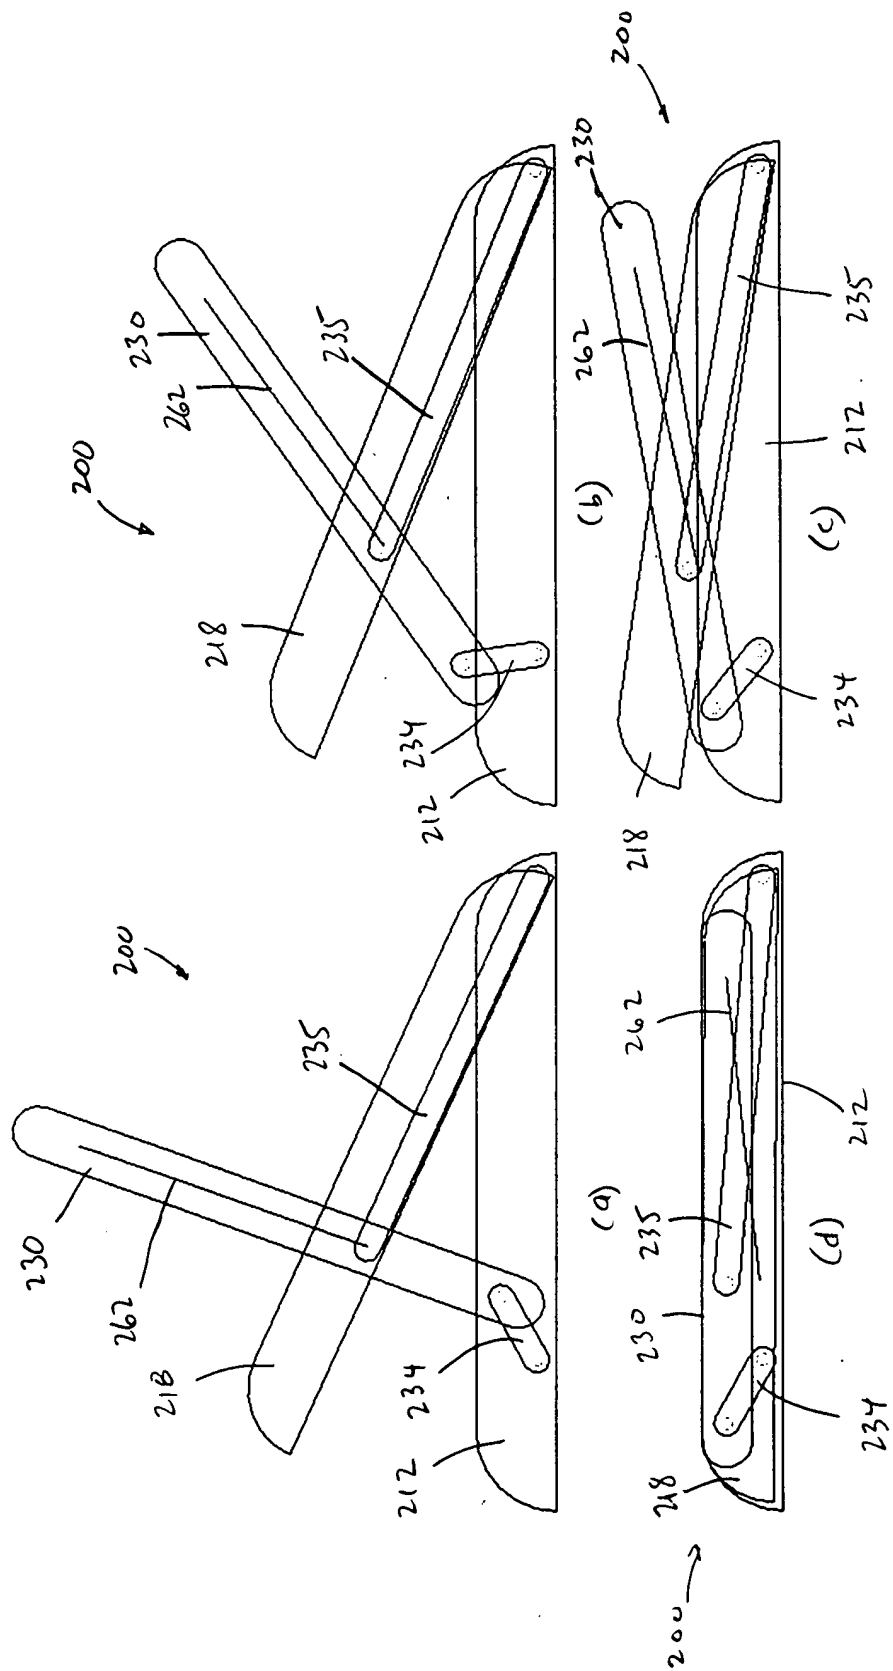


FIG. 16

FIG. 17

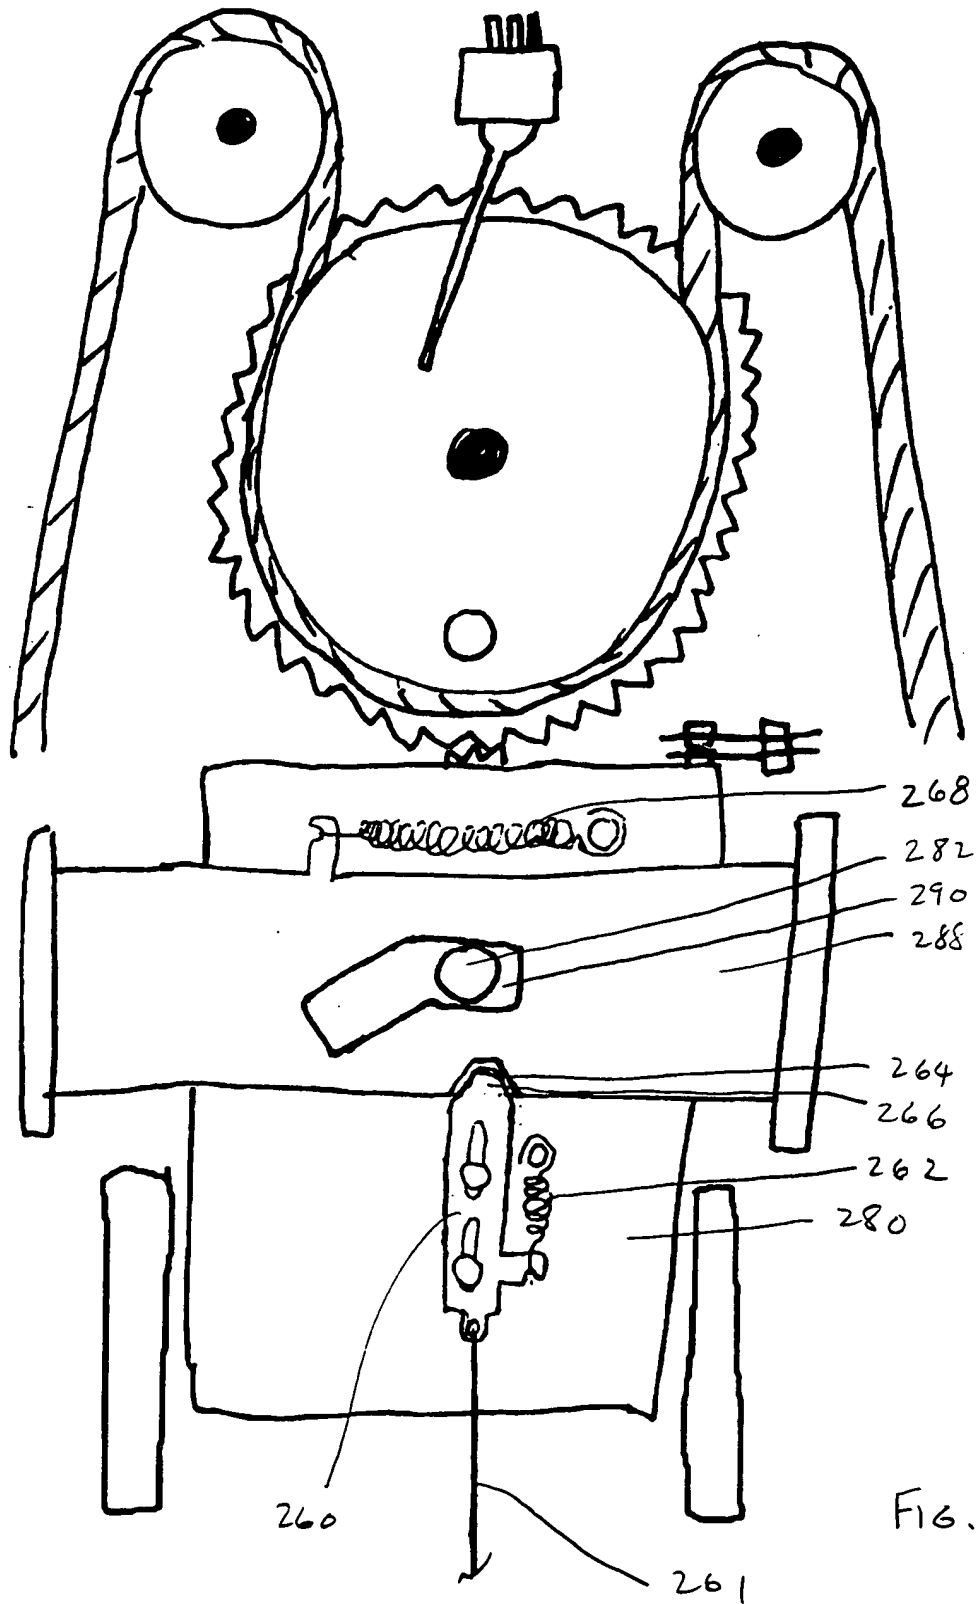


FIG. 17



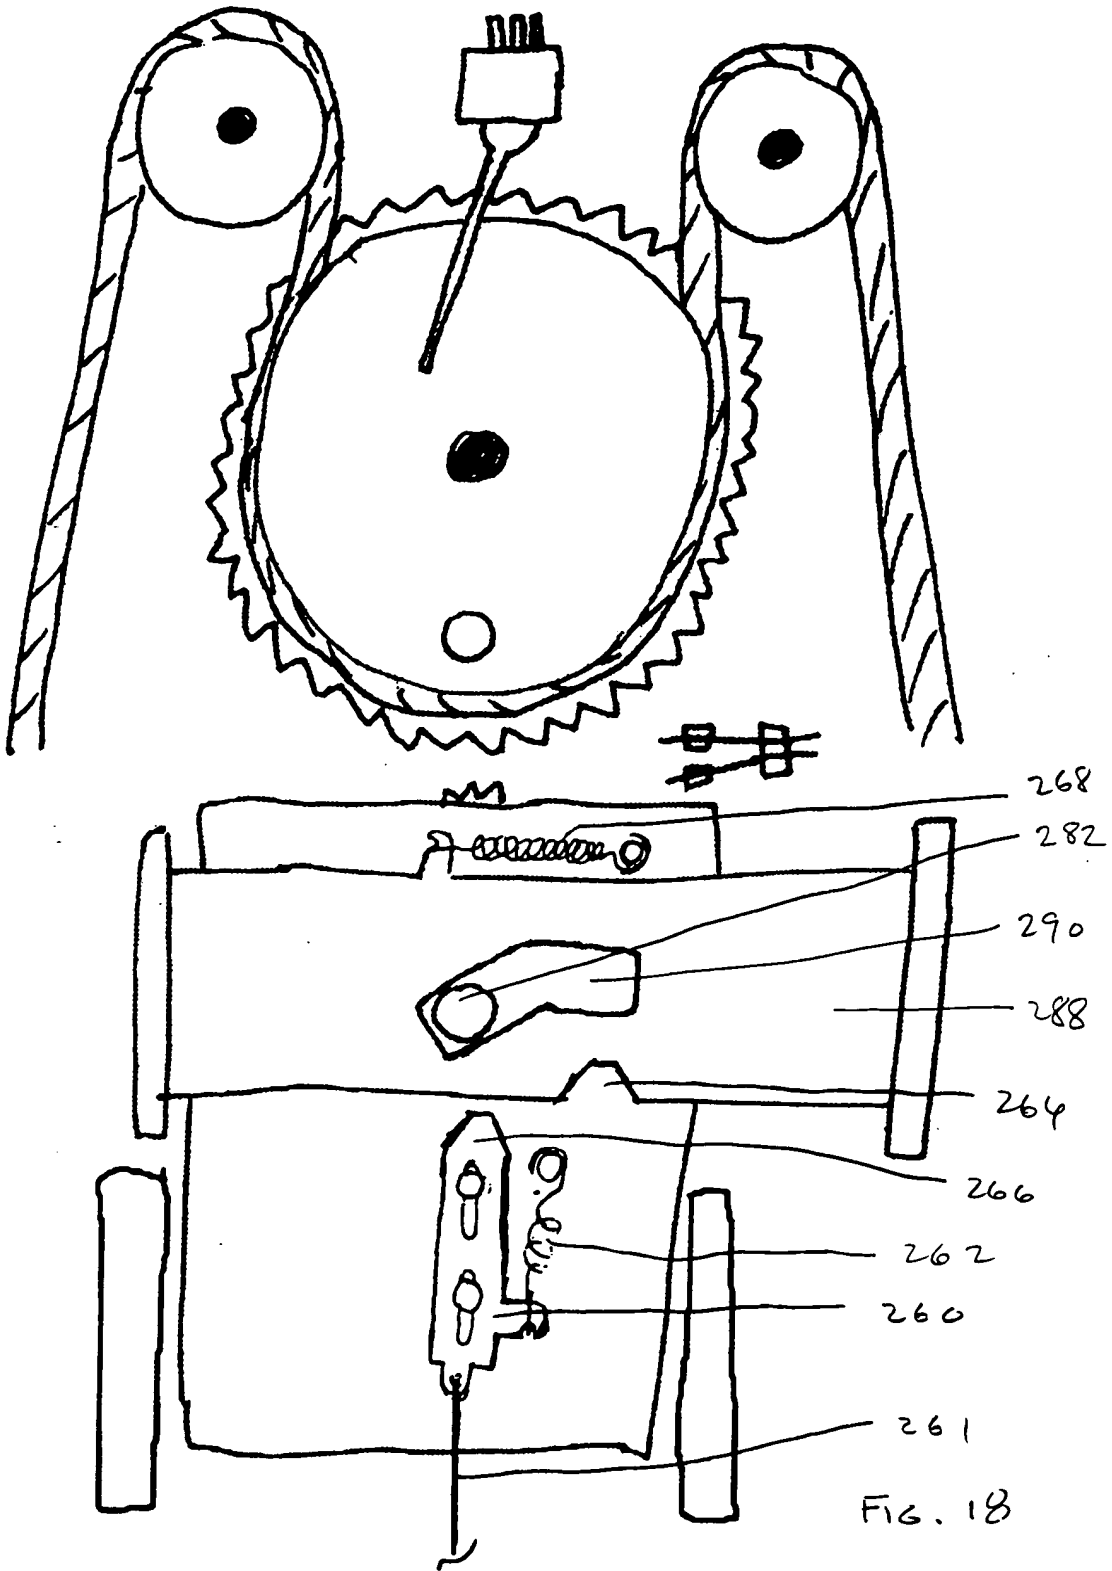


FIG. 18









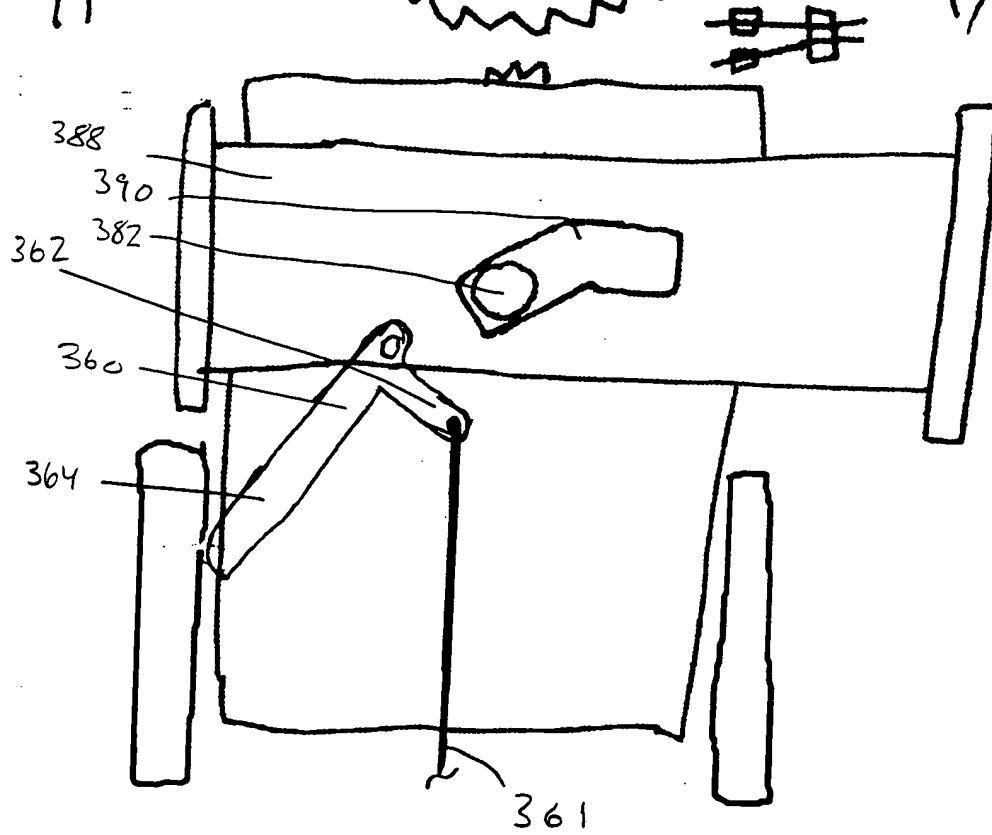


FIG 19

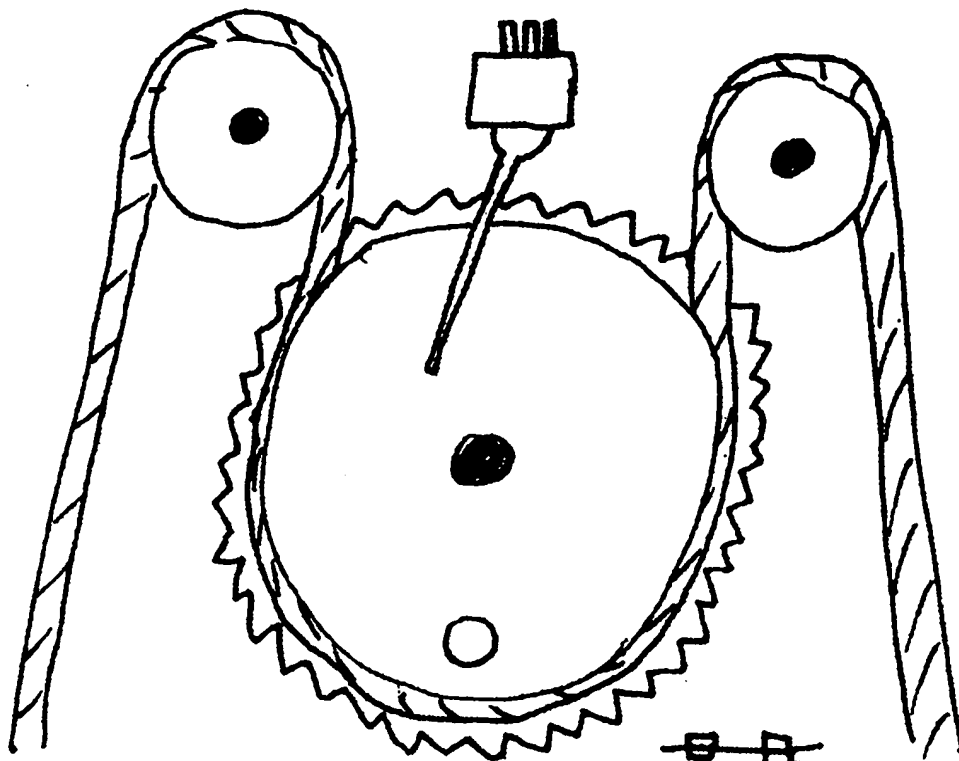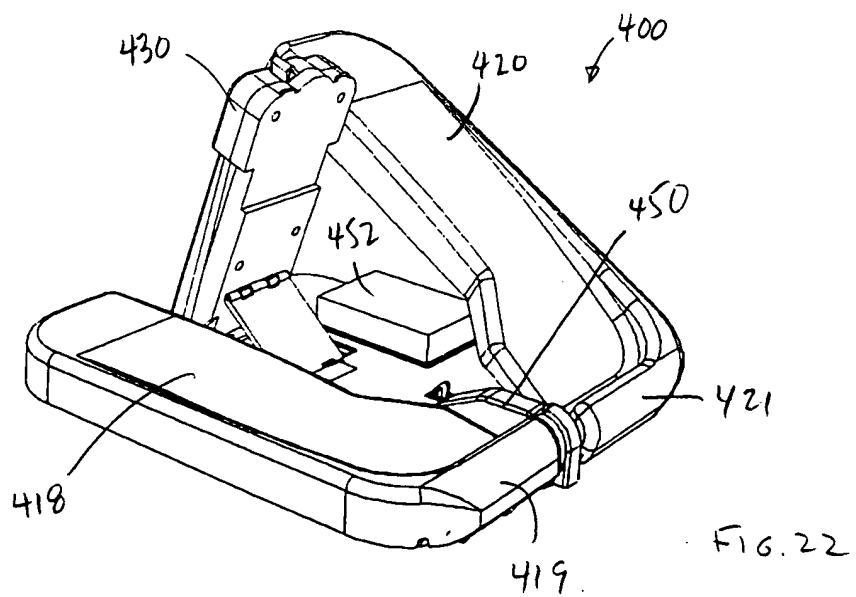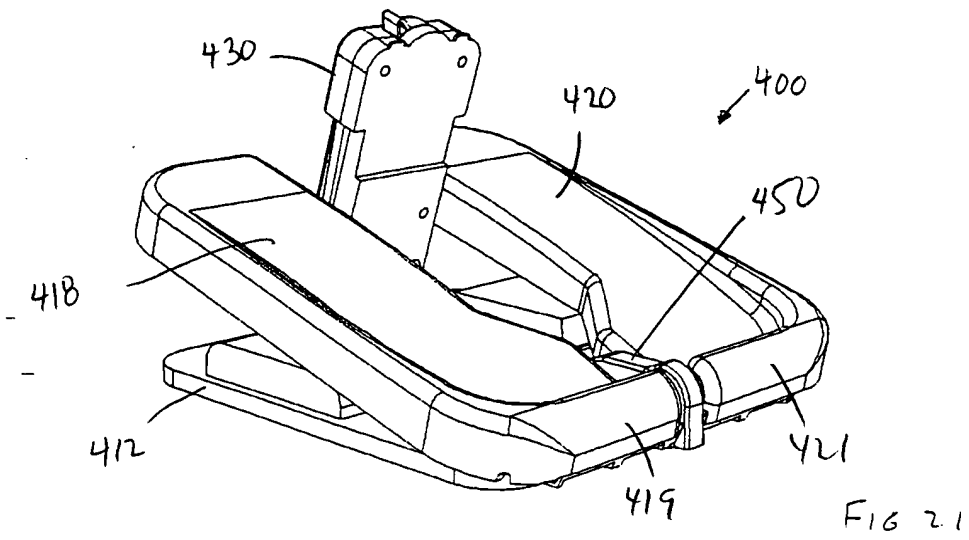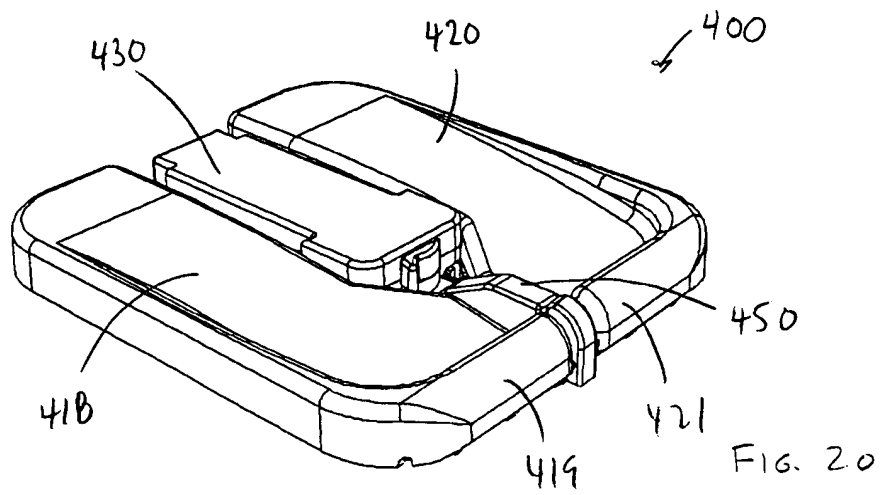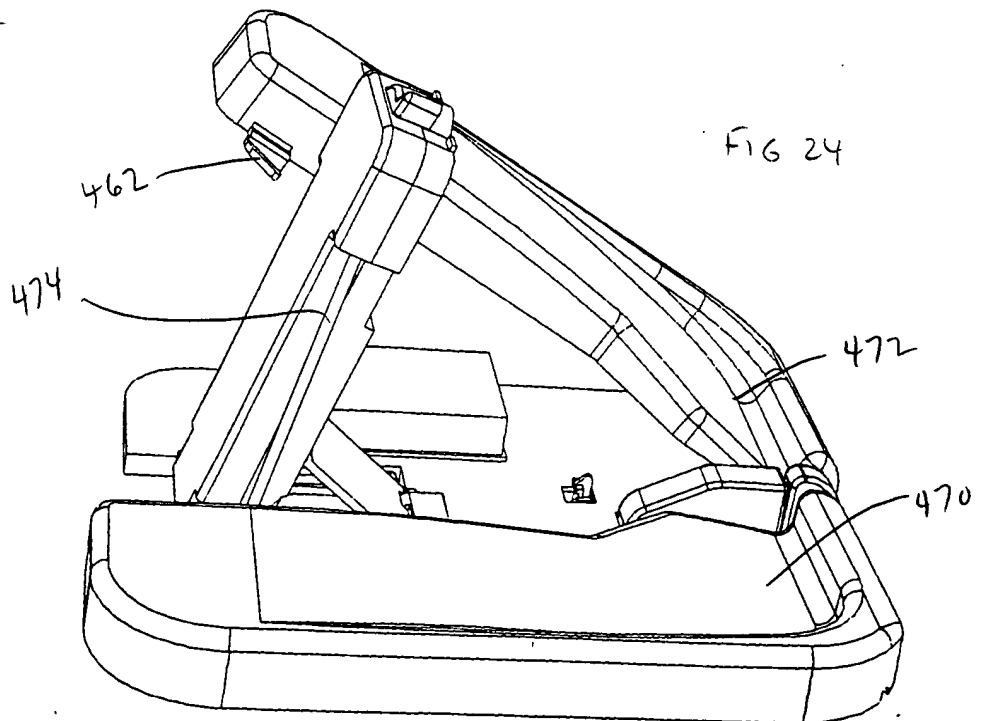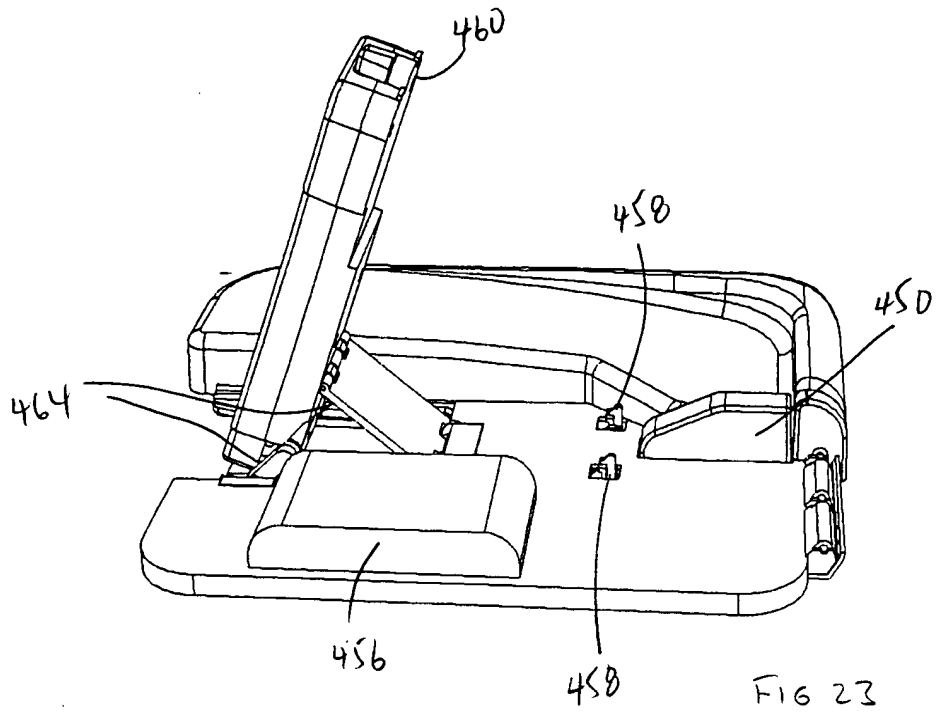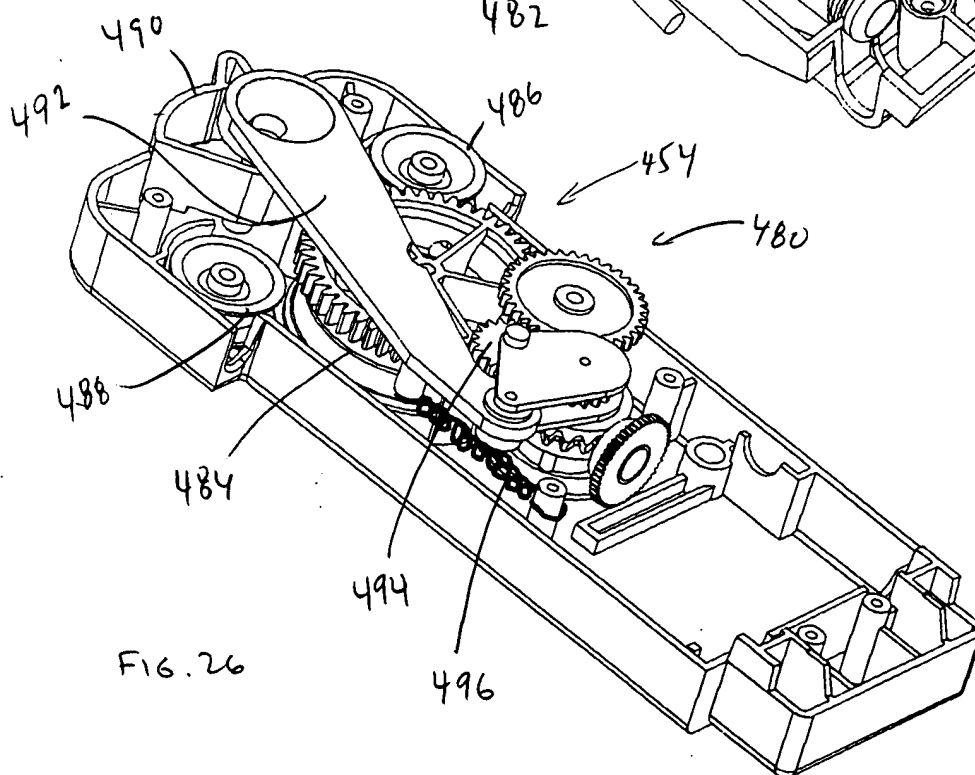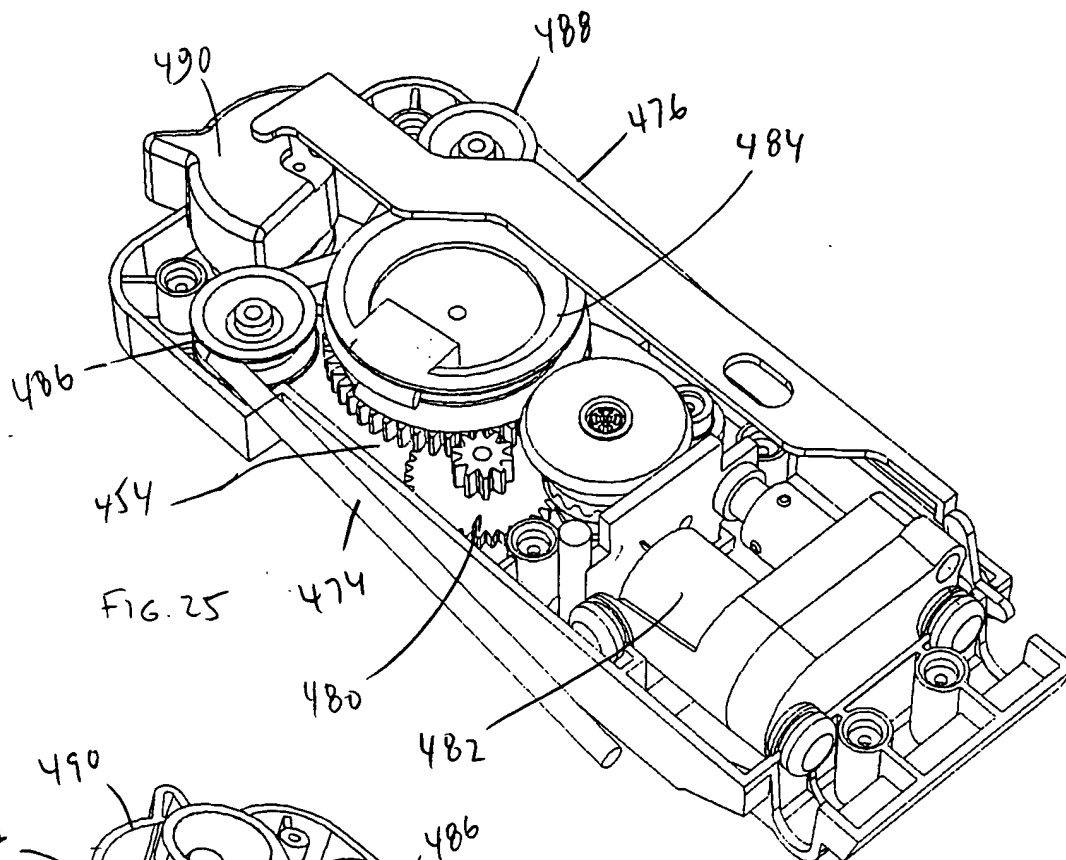

400 420 430 418 419 421 450 452





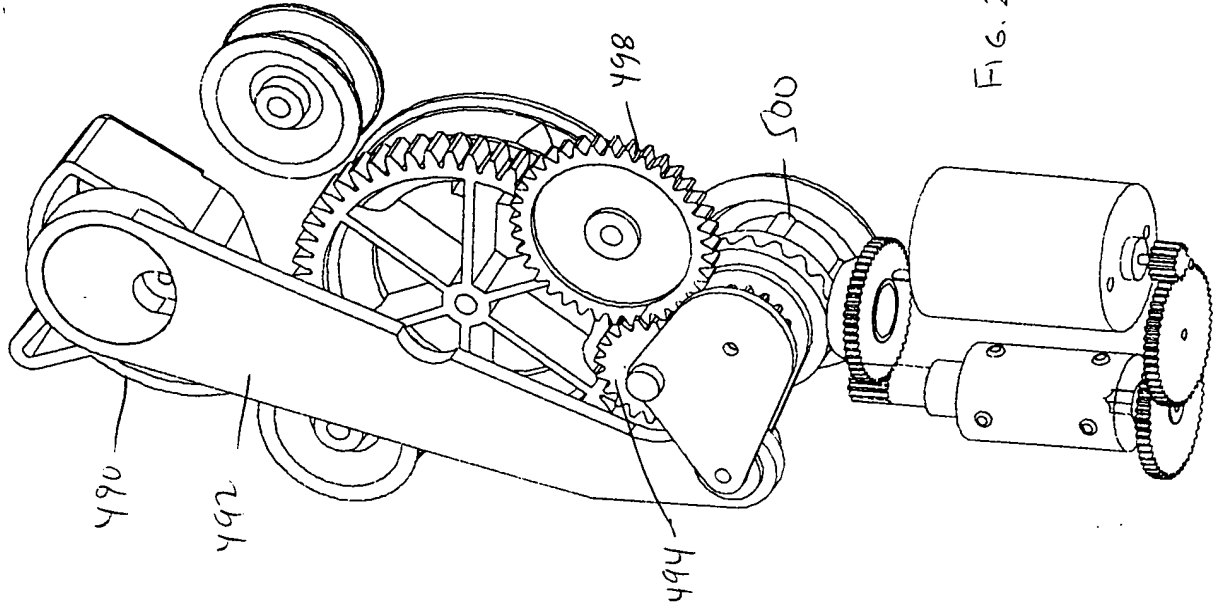
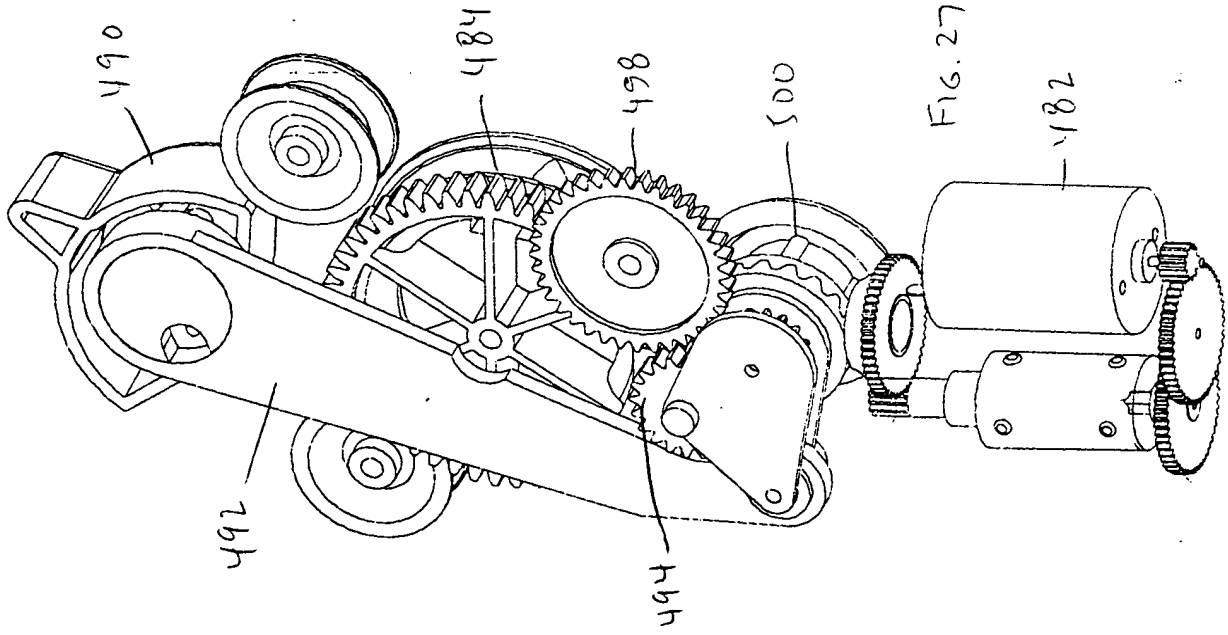


FIG. 28

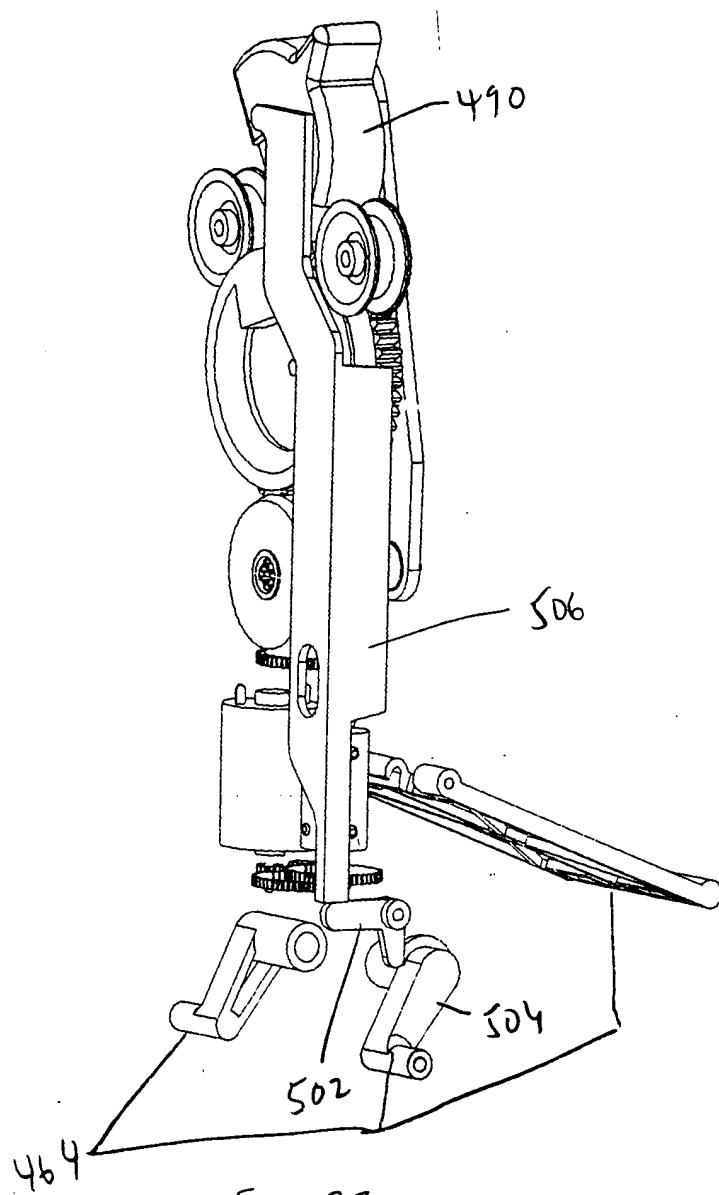


FIG. 29

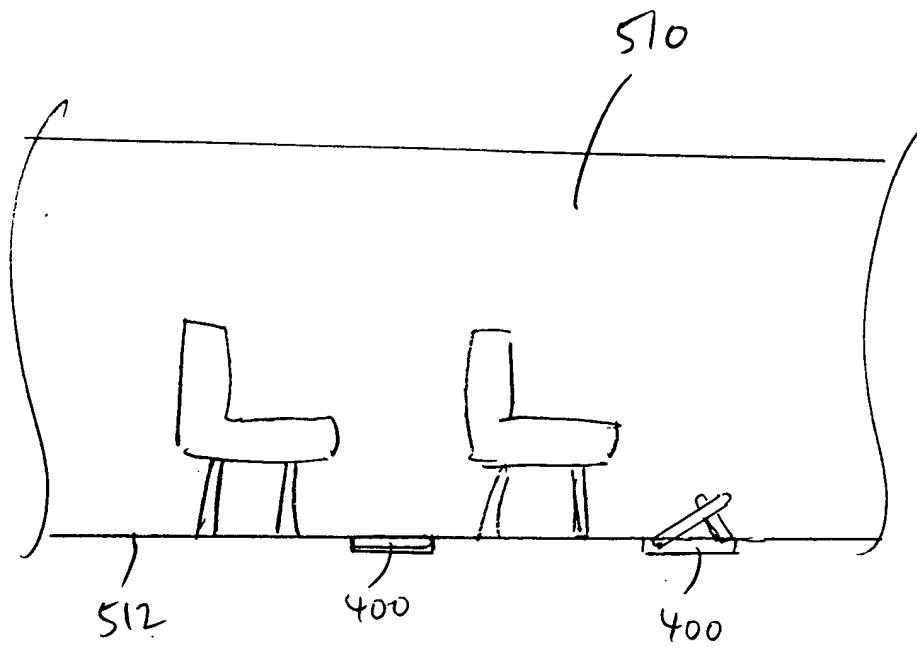


FIG. 30